



SUNSTREAM HELPS YOU ENJOY YOUR BOAT MORE.

Boating is our passion and, like you, we envisioned a future that minimized the hassles and frustrations of getting your boat in and out of water, accessing the hull and covering the boat. For over 25 years, we've been leading the industry by elevating boating experiences all over the globe. Our award winning engineering and design continue to push the boundaries of what's possible by producing many of the world's first free-standing, free-floating hydraulic boat lifts and automatic cover systems. You're invited to the future of boating.

Boat more, boat easier, boat better.











FLOATLIFT

Free-floating Freedom

Sunstream's FloatLift combines exceptional engineering with style and accessibility. Streamlined pontoons effortlessly support the hull with as little as 12 inches of water under the boat keel / skeg and the FloatLift easily ties to your dock or buoy just like your boat. Now, the convenience of Sunstream can go wherever your boat goes.

Slip into something comfortable.



1 Foam-Filled Floats

Unsinkable floats gives peace of mind that your boat is protected. The foam also enables the lift to support the boat on soft bottoms if the water drops.

2 Shallowest Water Floating Lift

When the frame is lowered, the boat typically only needs a few inches under the keel/skeg to clear this beam.

3 GravityLock™

The floats are locked in the up position with the wheels going over the top of this casting.

Designed to prevent accidental lowering if a hose leaks.

4 Cylinders Over the Water

The cylinders are kept safe from the elements by being above water in the up position, and fully retracted.

Stainless shaft, polyurea coated body and scraper seal gives long life to the cylinders.

5 SuperBunks™

Sunstream's Superbunks are known as the best bunks in the industry for ideal boat fit, durability, softness on hull, distributed load, and shallow water.

6 Adjustable Bunk Brackets

Bunks are adjustable to best fit boat. Optional longer brackets are available for boats with deep skegs.

7 Guides

Lift comes standard with one set of guides. An additional set may be added for the front.

8 Dock Line Ties

Lift can be tied to dock or mooring like a boat.

9 Spring Tie Line Location

Locations to secure Fore/aft lines.

10 Marine Grade Aluminum Frame


Built like an aluminum boat, with optional zincs for salt water use.

11 Stainless Steel Hardware

Lift is designed for long term durability in salt or fresh water.


12 Walk-on Floats

Access your hull and drives, with walk-on floats.

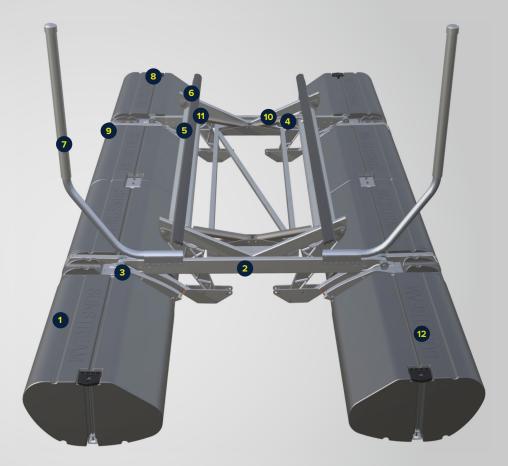

HIGH PERFORMANCE HYDRAULICS

Sunstream's powerful hydraulics pull the floats under the boat in as little as 30 seconds with the remote control. Charge the DC system with AC or solar options for complete freedom. The cylinders are retracted above the water when raised and optional zincs protect any aluminum components in contact with the water.



QUALITY CONSTRUCTION

Rise to the top and stay there. The Floatlift's foam-filled polyethylene pontoons quickly lift your boat out of the water and the patented GravityLock™ designed to keep your boat safe and sound. Now it's easier to keep your boat looking its best with clear access to your hull and prop for cleaning and maintenance. The frame is marine-grade aluminum and fitted with stainless steel hardware, so you can boat in fresh or saltwater. The cylinders are retracted and above the water when raised and zincs protect the frame like an aluminum boat. No other lift is built like a Sunstream.




SHALLOW WATER ACCESS

Designed to set you free, the FloatLift typically needs just 12" of water under the keel or skeg and the foam filled floats can support the boat on the soft seabed even if the tide goes out. FloatLift's low-profile floats split high waves so the lift can be used practically anywhere you would moor your boat. Powered by a solar option means you are ready for adventure anywhere.





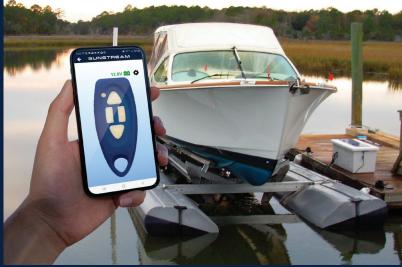

Optional HoverCover shown

BLUETOOTH & APP

Sunstream's optional Bluetooth transmitter and smartphone app give you the power to lift your boat with your phone! It also gives important lift diagnostics to prevent a problem from becoming a problem. Bluetooth technology has more consistent range, and is more responsive. Built-in security features protect your boat.





SWIFTSHIELD

Sunstream's SwiftShield automatic boat cover system helps you to use your boat more and protects your investment. Say farewell to the frustration that comes with traditional boat covers and hello to boating anytime you want. Be on the water in just 30 seconds with the push of a remote.



GOVERNMENT

Sunstream applied aerospace technology to create the fastest, most reliable boat lift for commercial use on the market today.

Sunstream's high speed boat lifts meet the demand for small craft support in multi-agency, enforcement, search and rescue, fire, and commercial applications. Combining technoligy with superior customer service has made

Sunstrea the preferred brand for the most demanding market.



| | MEDIUM | | LARGE | | | | | X-LARGE | | |
|---------------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|----------------|------------------|---------------|
| | FL6012D | FL7012D | FL10014D | FL13018D | FL13018D-W | FL15023D | FL15023D-W | FL24020D | FL36026D | FL40026D |
| Capacity | 5500lb / | 7000lb | 10500lb | 13000lb | 13000lb | 15000lb | 15000lb | 24000lb | 36000lb | 40000lb |
| | 2495kg | 3175kg | 4763kg | 5897kg | 5897kg | 6804kg | 6804kg | 10886kg | 16344kg | 18143kg |
| Lift Length | 20ft | 20ft | 24ft | 29ft | 29ft | 34ft | 34ft | 38ft | 44ft | 44ft |
| | 6.1m | 6.1m | 7.32m | 8.84m | 8.84m | 10.37m | 10.37m | 11.59m | 13.42m | 13.42m |
| ift Width | 10.5ft | 10.5ft | 11.9ft | 11.9ft | 13.3ft | 11.9ft | 13.3ft | 16ft | 16ft | 16ft |
| Jp Position | 3.23m | 3.23m | 3.38m | 3.38m | 4.08m | 3.38m | 4.08m | 4.88m | 4.88m | 4.88m |
| Veight | 1300lb | 1600lb | 2500lb | 2900lb | 3100lb | 3825lb | 3900lb | 8000lb | 9000lb | 9000lb |
| | 590kg | 725kg | 1134kg | 1315kg | 1406kg | 1737kg | 1771kg | 3632kg | 4086kg | 4086kg |
| aunching Speed | 18sec | 18sec | 18sec | 40sec | 40sec | 60sec | 60sec | 60sec | 90sec | 90sec |
| Vater Depth | Draft + 12in | Draft + 16in | Draft + 20in | Draft + 20in | Draft + 20in |
| Required | 30cm | 30cm | 30cm | 30cm | 30cm | 30cm | 40cm | 50cm | 50cm | 50cm |
| lin Slip Width | 12ft | 13ft | 14ft* | 14ft* | 16ft | 14ft* | 16ft | 22ft | 22ft | 22ft |
| | 3.66m | 3.96m | 4.27m* | 4.27m* | 4.88m | 4.27m* | 4.88m | 6.71m | 6.71m | 6.71m |
| lax Boat Beam | 8.5ft | 8.5ft | 10.5ft | 10.5ft | 12ft | 10.5ft | 12ft | 14ft | 14ft | 14ft |
| | 2.62m | 2.62m | 3.23m | 3.23m | 3.66m | 3.23m | 3.66m | 4.19m | 4.27m | 4.27m |
| Allowable Draft for | 20-22in | 20-22in | 34in | 34in | 34in | 34in | 34in | 40in | 40in | 40in |
| Typical V-Hull | 50-55cm | 50-55cm | 86cm | 86cm | 86cm | 86cm | 86cm | 121cm | 121cm | 121cm |
| HOVER COVER | | | | | | SWIFTSHIE | ELD | U-Series Swift | Shield Mechanisi | m for FL10014 |
| | | UC2/109 | | HC30444 | | | | CC AMI 11212 | 4 | |

| | HC24108 | HC30144 | | SS-AMU13124 |
|--------------------------------------|-------------------------------------|---------------------------------------|-------------------------------|----------------------|
| Length | 24ft 7.32m | 30ft 9.14m | Max Boat Beam | 9ft 4in |
| Width Between Uprights | 106in 2.69m | Min 114in / 2.89m Max 126in / 3.2m | Max Boat Length | 30ft |
| Cover Material | Sunbrella Canvas (Navy Standard) | Sunbrella Canvas (Navy Standard) | | |
| Lift Model | FL6012 | FL10014D FL13018D FL15023D | | |
| Max Boat Height w/o HC Extensions | N/A | 103in 2.61m | * Wider slip required for bea | ams over 9'6" / 2.9m |

SUNSTREAMFLOATLIFT





SUNLIFT XNext-Gen
Free-Standing Lift

HELIX-P Rotary Hydraulic Cable Lift SWIFTSLIFE

SWIFTSHIELD Automatic Cover System



SUNLIFT LEGACY Original Hydraulic Free-standing Lift



SUNPORT2 PWC Drive-On Dock BOAT MORE, BOAT EASIER

BOAT BETTER.

sunstreamboatlifts.com